




Temperature sensor and FAN controller

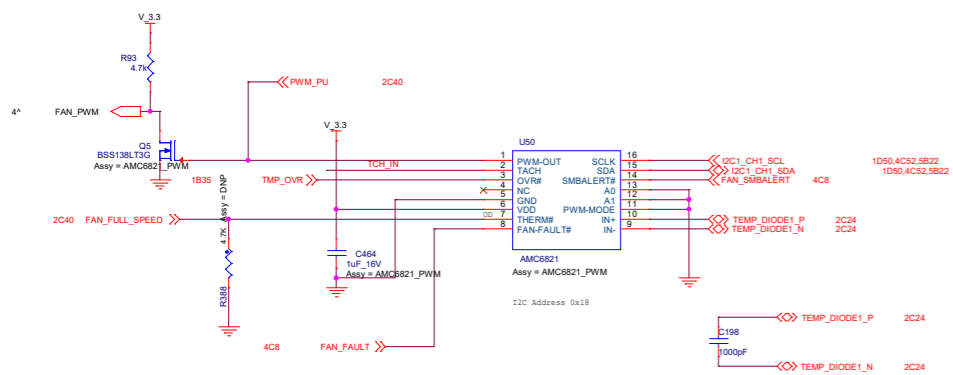


Secondary temperature sensor

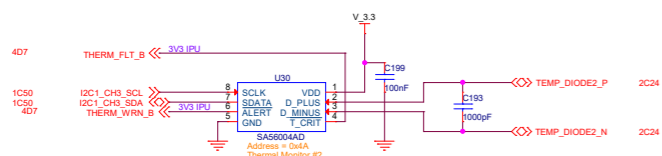


Two MDC/MDIO controllers

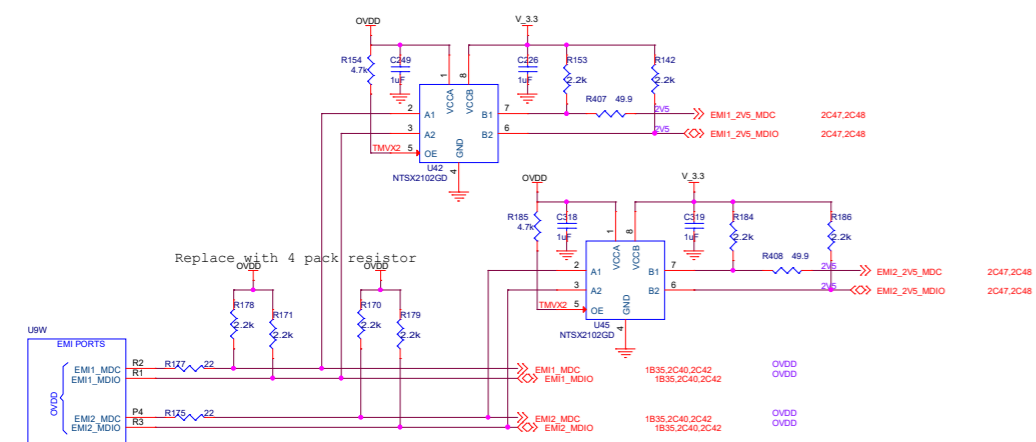


Two USB 3.0 controllers configured as host

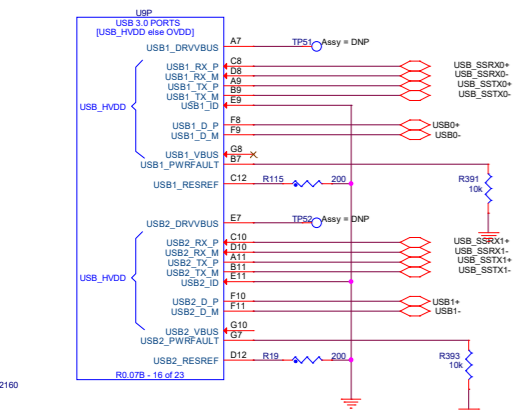



SD controller

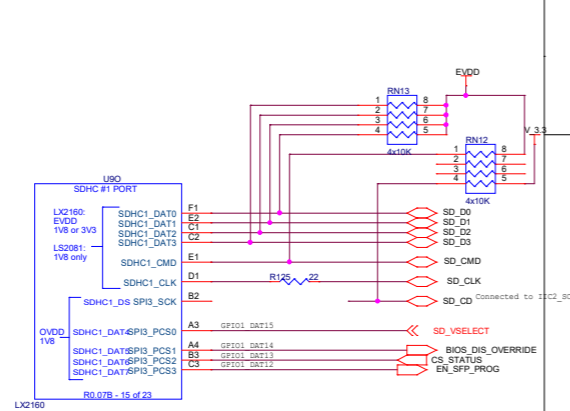


2Mb I2C eeprom and RTC clock

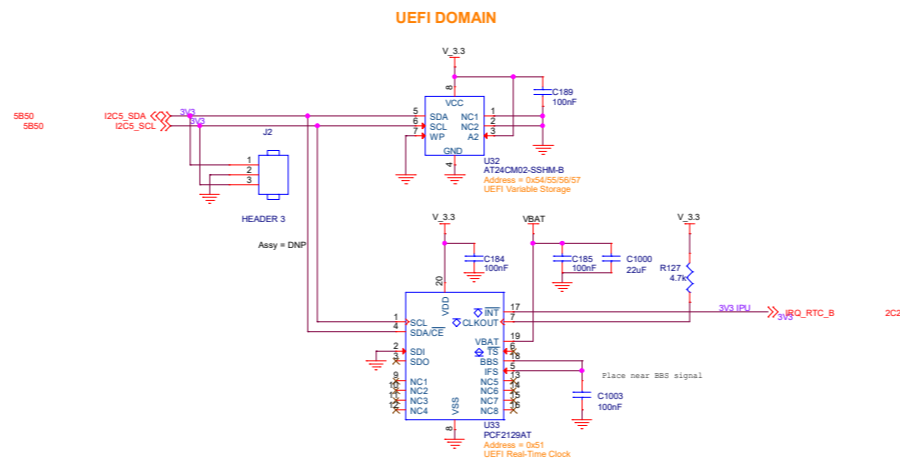


512Kb bootable I2C eeprom, 2Kb variables i2c eeprom and header

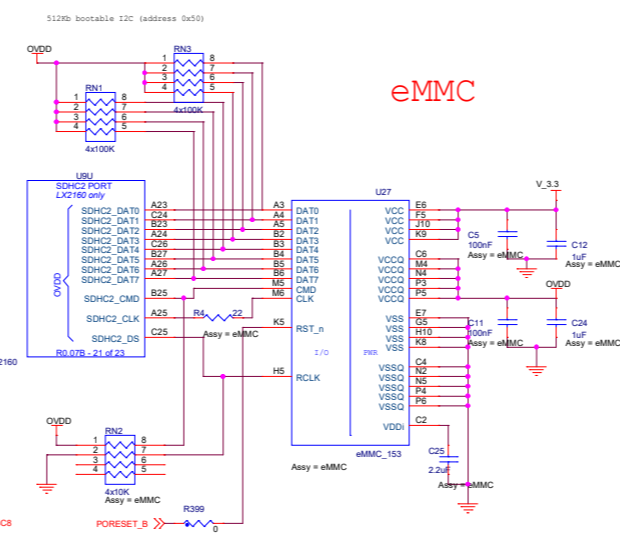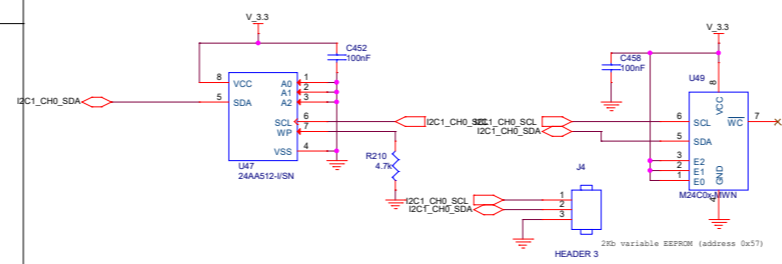


3.3v voltage indication LED




SERIAL UART 0 and 1

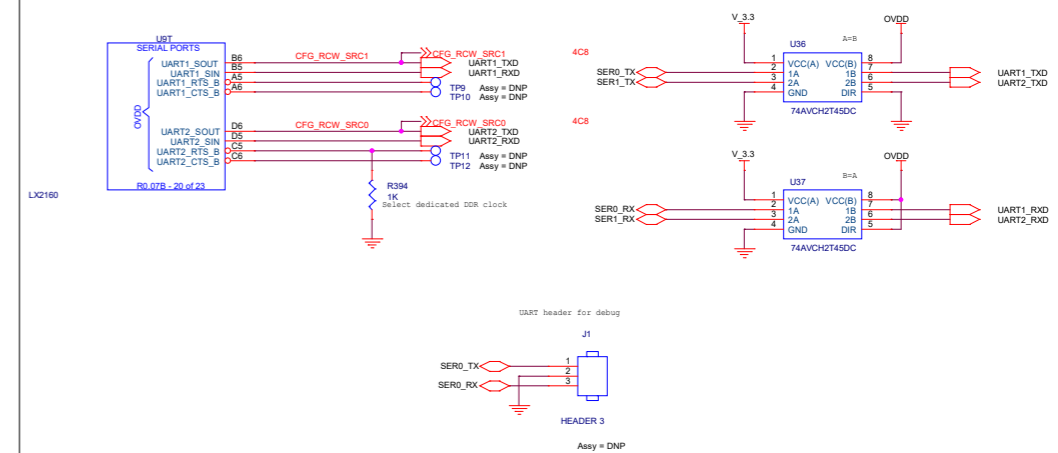


I2C controllers and MUX

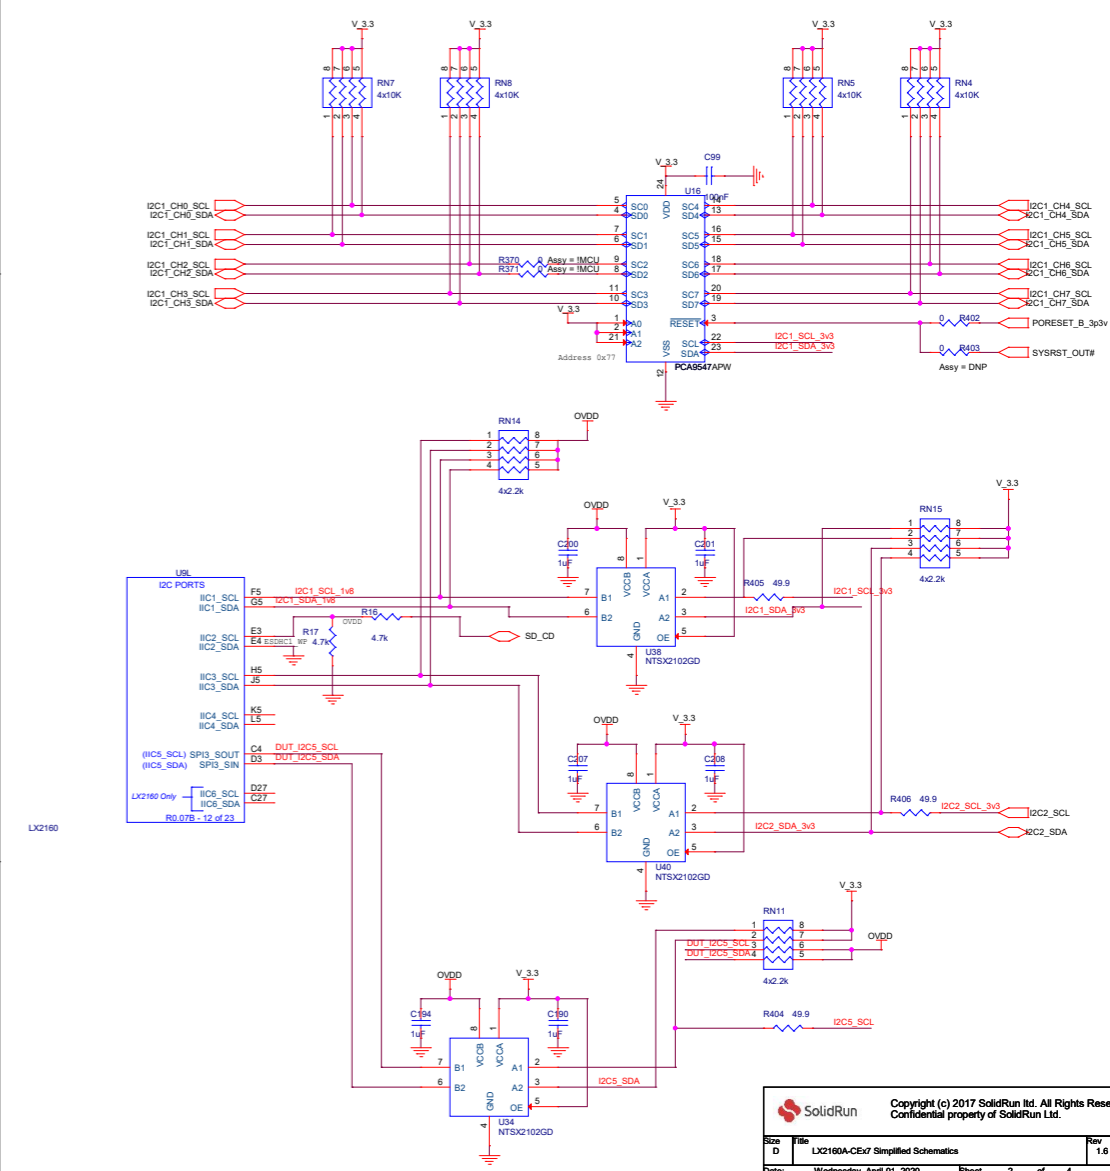


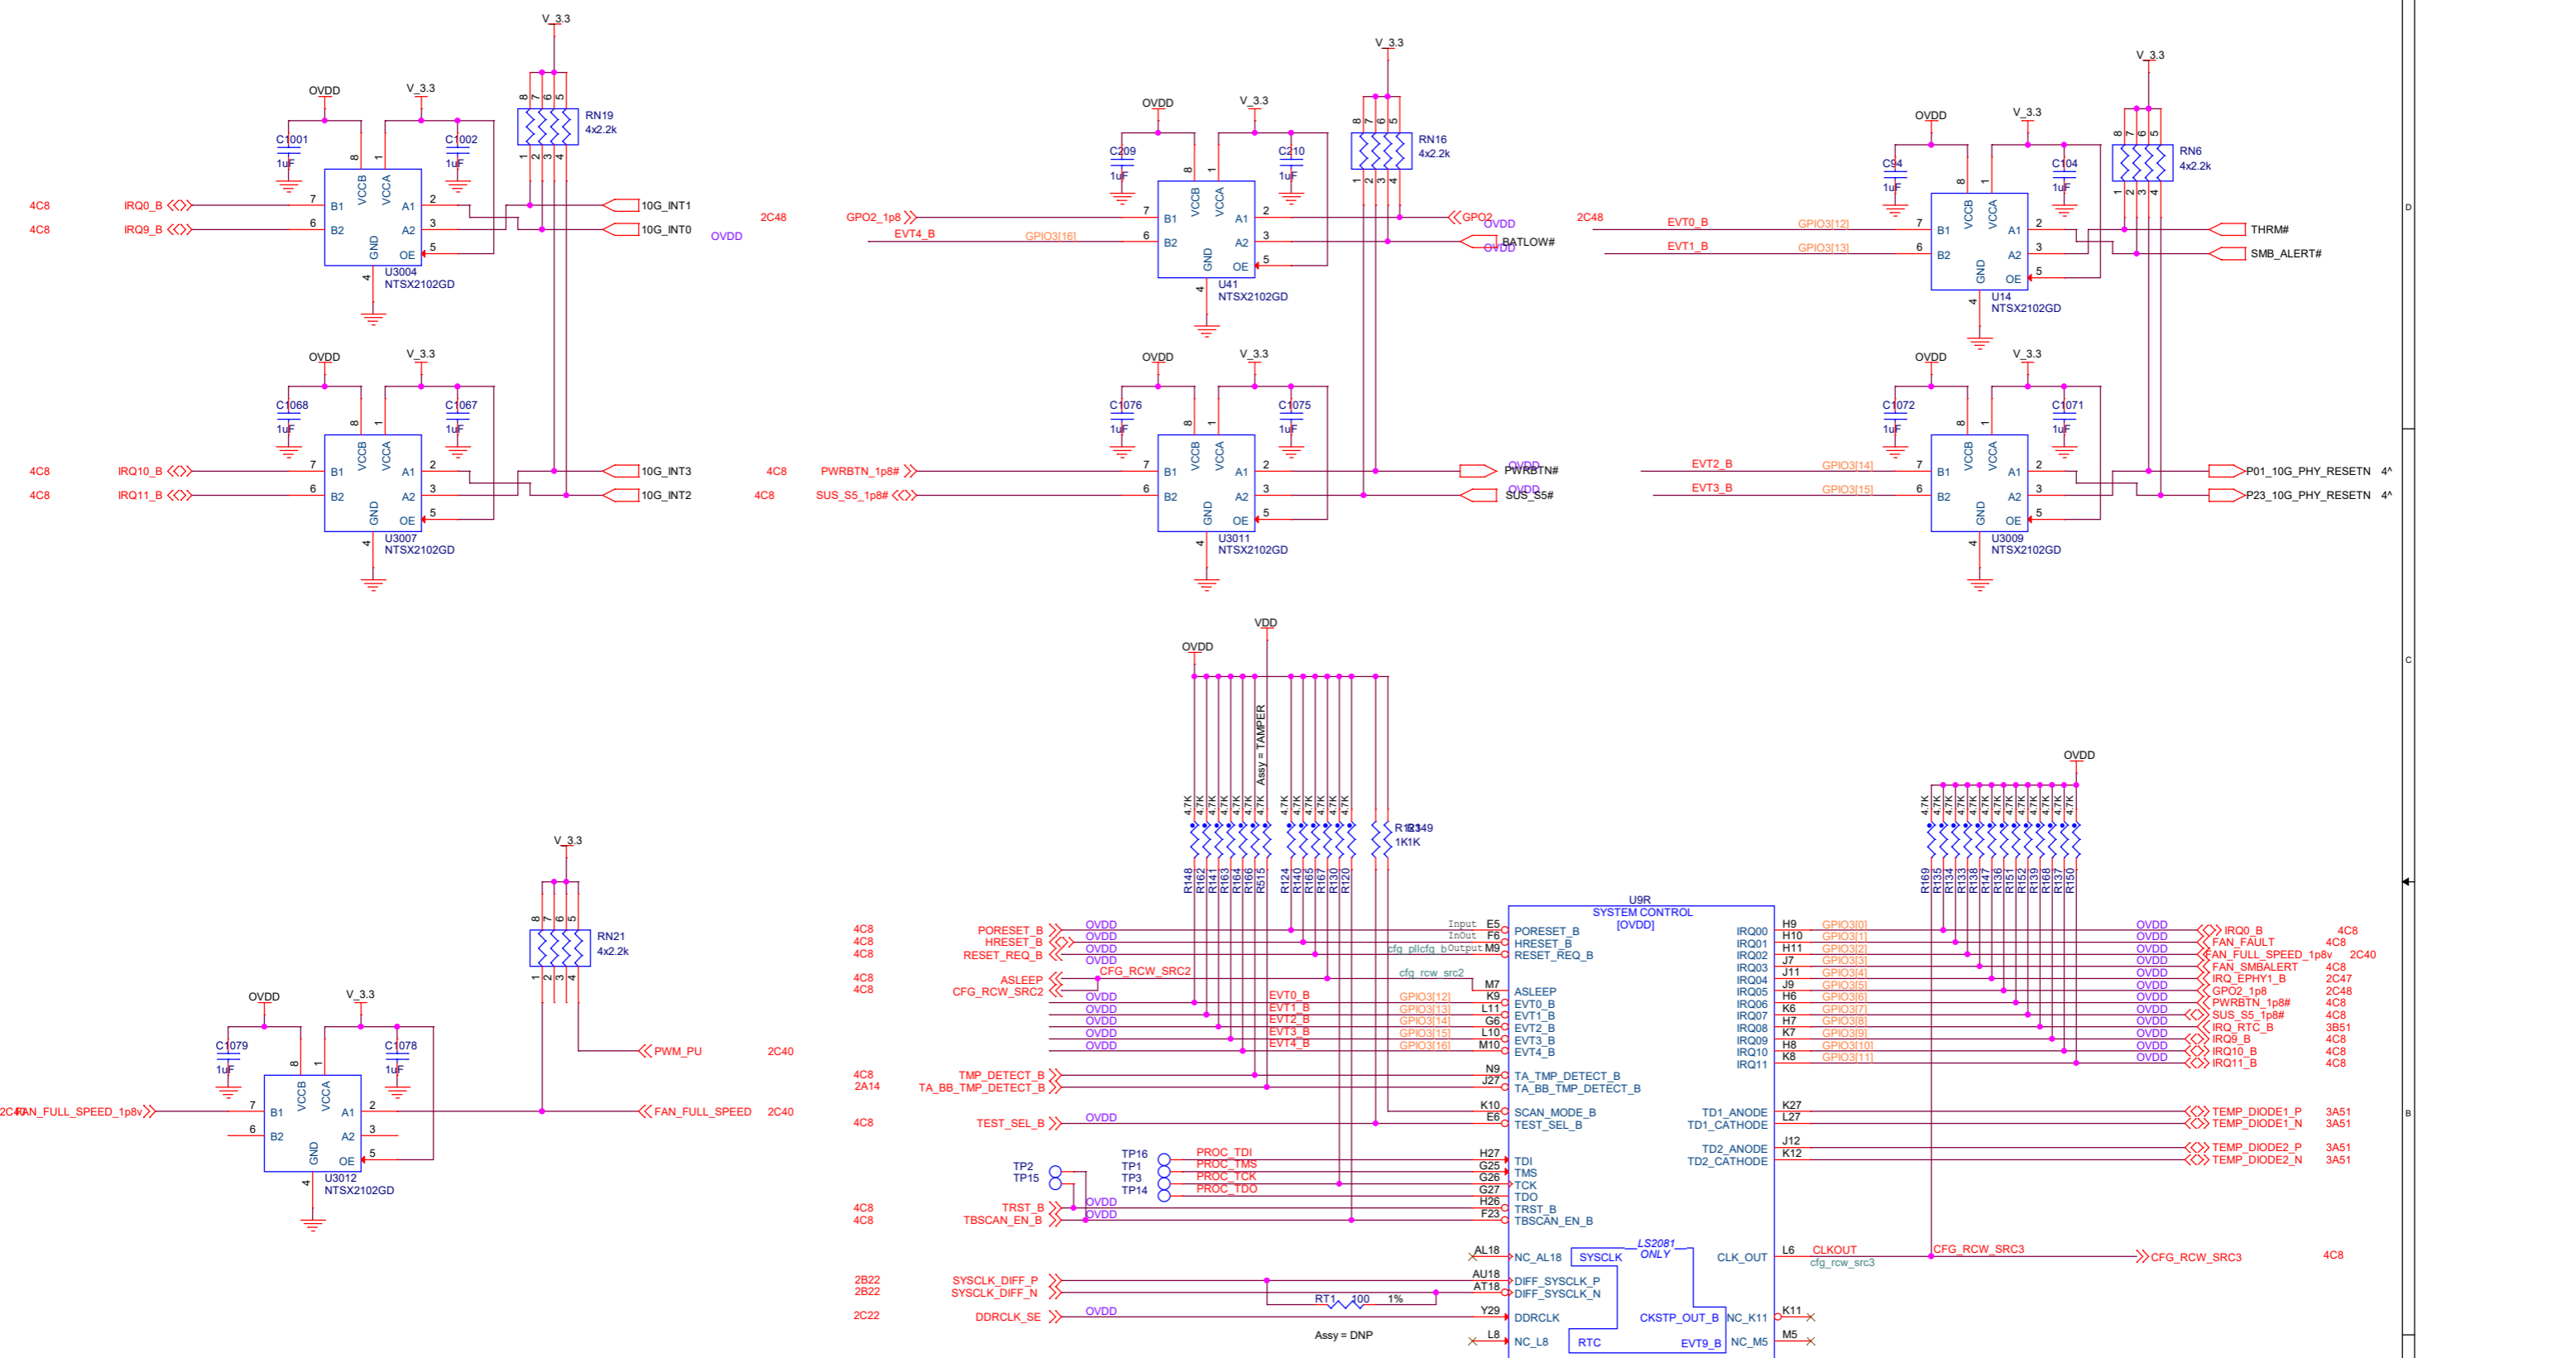


USB 3.0 hub

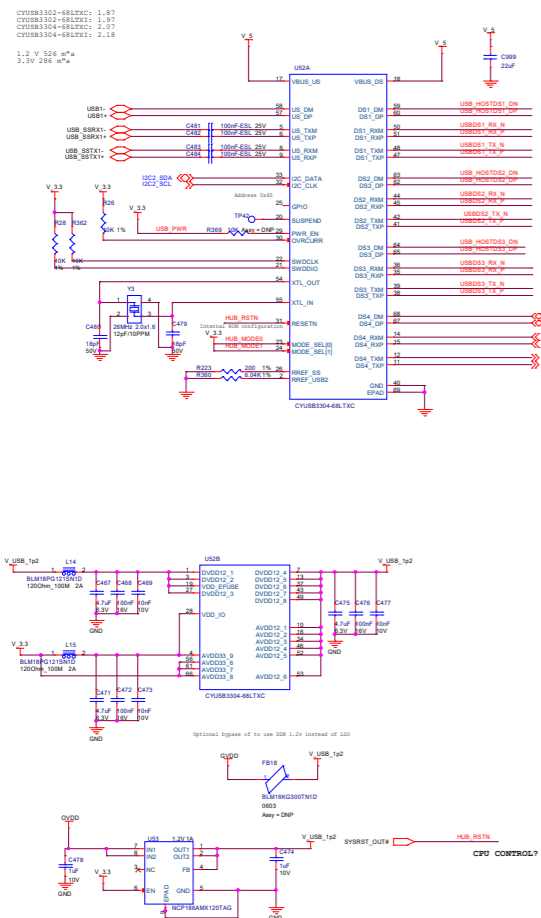


1Gbps Ethernet copper

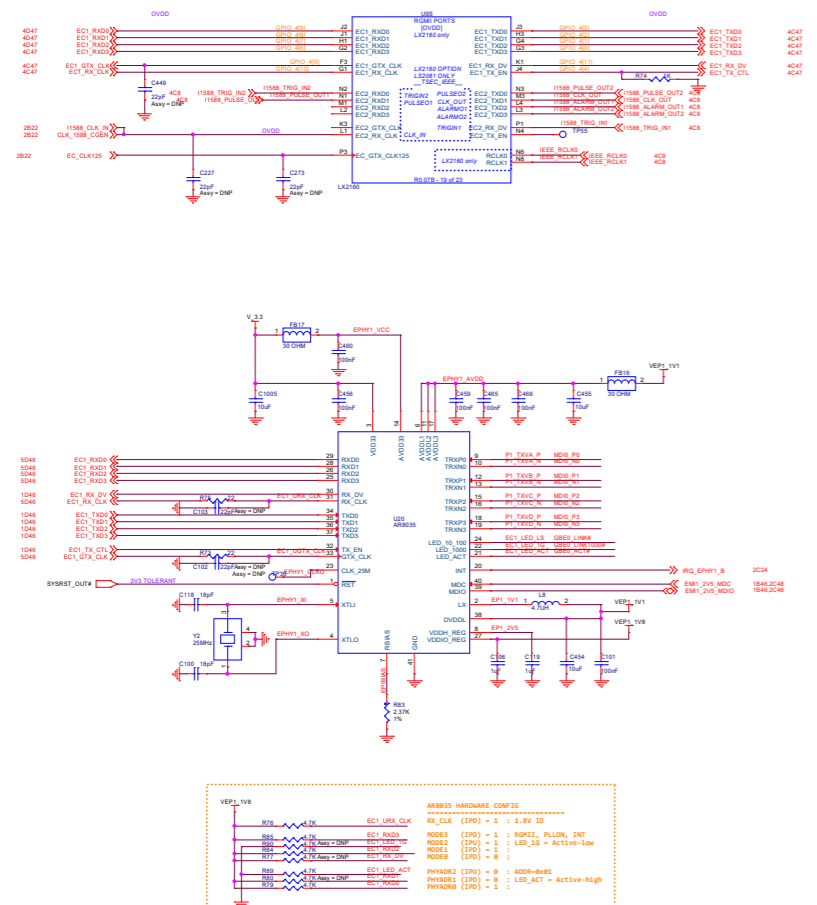

Mechanical holes



COM Express type 7 A/B

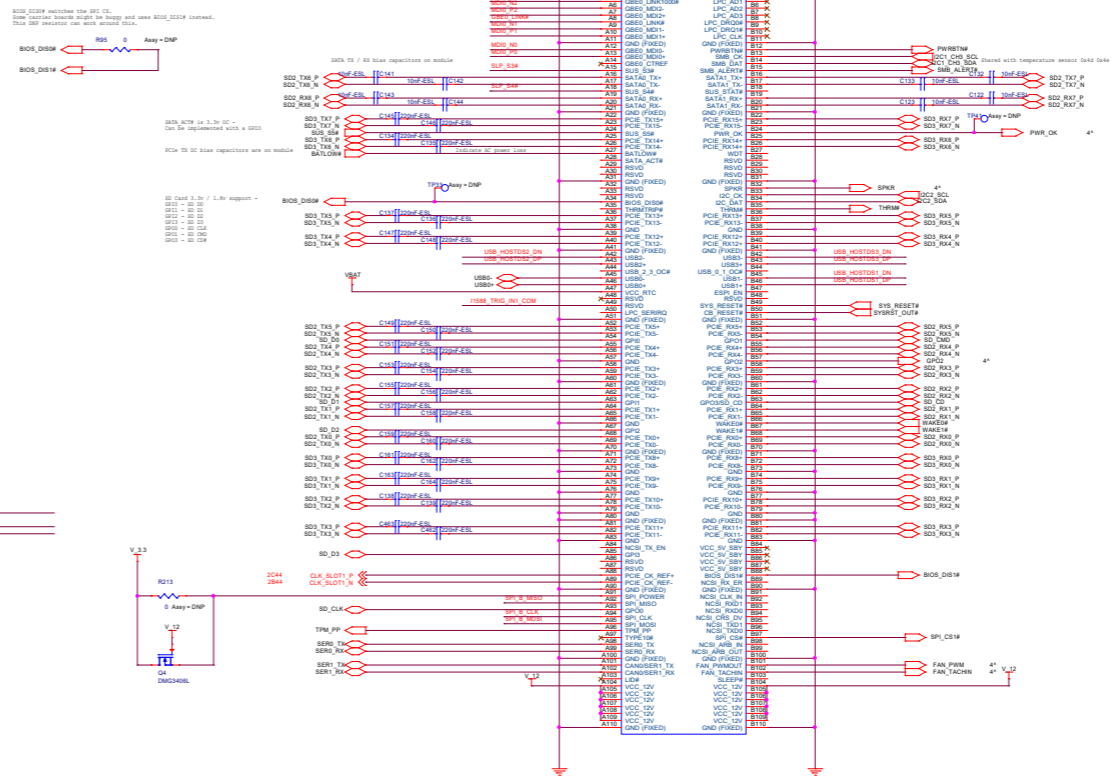

COM Express type 7 C/D

